


- NOTES**
1. CARRIAGWAY SURFACING WORKS TO TIE INTO TABLES TO EAST (CROSSRAIL LIVERPOOL STREET SCHEME) AND WEST (EXISTING).
 2. WORKS TO TIE INTO PROPOSED CONTRAFLOW CYCLE LANE ON ELDON STREET. LANE WIDTH 2.0M. DESIGN AND LAYOUT TO BE CONFIRMED.
 3. EASTBOUND CARRIAGWAY LANE TO BE MINIMUM 3.5M ON ELDON STREET.
 4. BUILDOUT AT JUNCTION WITH FINSBURY AVENUE, WIDTH LIMITED BY NEED TO MAINTAIN 2.0M WESTBOUND CONTRAFLOW CYCLE LANE AND 3.5M EASTBOUND GENERAL TRAFFIC LANE. KERB TRANSITIONS BACK TO ORIGINAL ALIGNMENT AT TANGENT POINT ON CORNER AT EASTERN EXTENT OF WORKS.
 5. WORKS ON FINSBURY AVE LIMITED TO PUBLIC HIGHWAY WITH WORKS ON PRIVATE LAND CARRIED OUT BY OTHERS.

- KEY**
- NEW 63MM DEEP YORKSTONE PAVING, 600MM WIDE, VARYING LENGTHS TO BE LAID PERPENDICULAR TO ADJACENT KERB
 - NEW 63MM DEEP YORKSTONE PAVING, 300MM X 200MM TO BE LAID PERPENDICULAR TO ADJACENT KERB
 - REMEDIAL WORKS TO KERBS AND FOOTWAY. ANY DAMAGED MATERIAL TO BE REPLACED WITH NEW. EXTENT TO BE AGREED
 - TAKE UP AND RELAY 2 COLOUR MIX GRANITE SETTS AND CHANNEL (70% SILVER GREY, 30% MID GREY) LAID RANDOMLY, FLAMED TOP
 - CARRIAGWAY TO BE RESURFACED IN HRA
 - NEW 400X400X63MM YORKSTONE TACTILE PAVING
 - NEW 150 X 300MM FLAMED TEXTURED SILVER GREY PORTUGUESE GRANITE KERB
 - NEW 300 X 200MM FLAMED TEXTURED SILVER GREY PORTUGUESE GRANITE KERB
 - PROPOSED NEW BOLLARDS
 - EXISTING GULLY FRAME TO BE REPLACED WITH NEW 450X450MM CYCLE FRIENDLY FRAME AND COVER
 - PROPOSED NEW 900X450MM GULLY FRAME AND COVER
 - DROPSHAFT COVER TO BE REPLACED WITH NEW
 - CURRENT EXTENT OF PUBLIC HIGHWAY
 - PROPOSED NEW HIGHWAY BOUNDARY

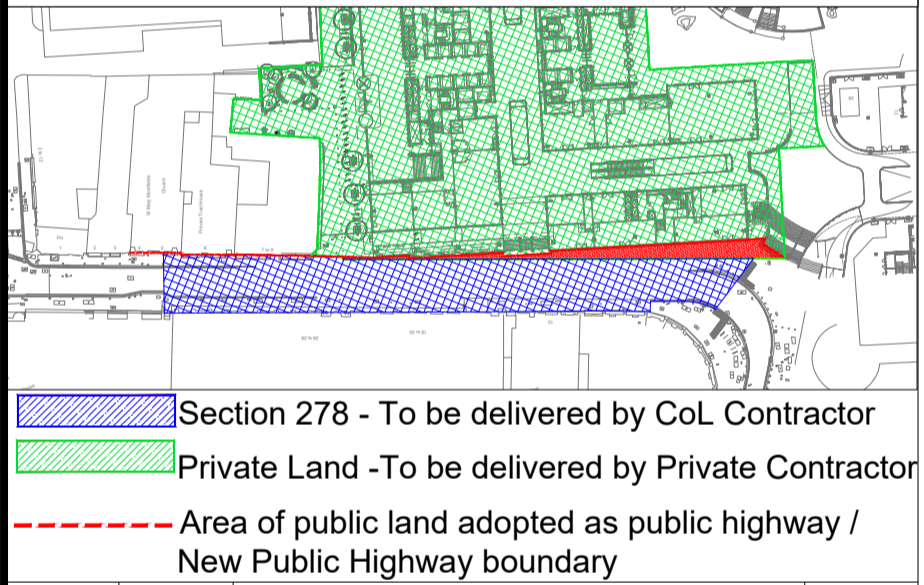

Rev No.	Date	Description	By

PROJECT: **1-2 BROADGATE S278 WORKS**
ELDON STREET/FINSBURY AVE

TITLE: **GENERAL ARRANGEMENT SHEET 1 OF 2**

CLIENT: **HIGHWAY DESIGN AND CONSTRUCTION**
 DEPARTMENT OF THE BUILT ENVIRONMENT
 PO BOX 270
 GUILDHALL
 LONDON
 EC2P 2EJ
 TEL: 020 7606 3030

Sheet: SHEET 1 of 2
 Date: August 2024
 Designed by: KE
 Checked by: BM
 Scale & Drawing Size: 1:200@A3
 Revision: --
 Drawing No: 100-16800438-GA-001

Church

Trust House

FINSBURY AVENUE

ELDON STREET

SEE SHEET 100-16800438-GA-002

Carriageway surfacing works and line markings to tie into existing raised table

Gullies to be reconstructed to suit new kerbline

New 300x200x63mm Scoutmoor Yorkstone Paving

Infill cover required for tactile paving

Remedial works to footway to accommodate re-laid / new kerbs. Extent to be agreed

5

6

7 to 9

26 to 28

18 to 20